

100% Water Proof

Niveeta SPC Flooring

The Future of Flooring





SPC88003-1



SPC88003-3



SPC88004-2



SPC88004-5



SPC88006-2



SPC88006-6



SPC88006-4



SPC88007-1




SPC88022-6



SPC88023-3



SPC88023-5

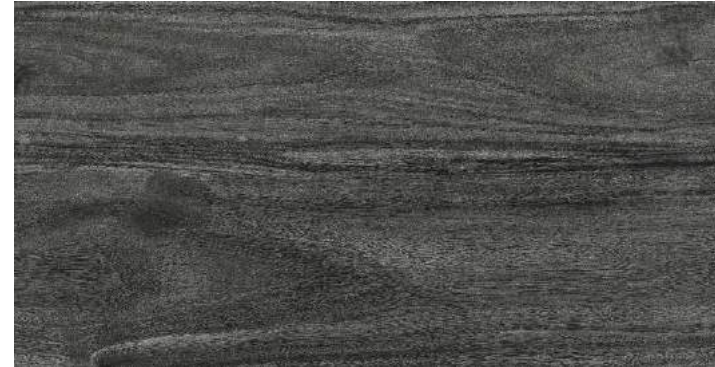

SPC88025-5



SPC88026-1



SPC88026-6





SPC88007-3



SPC88008-1



SPC88009-1



SPC88009-4



SPC88021-1



SPC88021-6



SPC88022-2



SPC88022-3



SPC Flooring Advantage

Advantage of Niveeta SPC Flooring:

1) Waterproof and Dampproof

As the main component of SPC is stone powder, so it performs well with water, and mildew will not happen with high humidity.

2) Fire Retardant

According to the authorities, 95% of the victims were burned in the fire caused by the toxic fumes and gases. The fire rating of SPC flooring is NFPA CLASS B. Flame retardant, not spontaneous combustion, leave the flame automatic out in 5 seconds, won't produce toxic or harmful gases.

3) No Formaldehyde

Niveeta SPC is high quality stone powder & PVC resin, without harmful material such as benzene, formaldehyde, heavy metal.

4) No Heavy Metal, No Lead Salt

The Stabilizer of Polyleaf SPC is Calcium zinc, no lead salt heavy metal

5) dimensionally Stable

Exposed to 80° heat, 6 hours—Shrinkage $\leq 0.1\%$; Curling $\leq 0.2\text{mm}$

6) High Abrasion


Niveeta SPC flooring has a transparent wear-resisting layer, whose revolution is up and higher than 10000 turns.

7) Superfine Anti-slipping

Niveeta SPC flooring has special skid resistance and wear-resisting layer of the floor. Compared with common floor, SPC flooring has higher friction when it's wet.

8) Low requirement of subfloor

Compared to traditional LVT, SPC flooring has a distinct advantage because it is rigid core, which can hide many imperfections of subfloor.

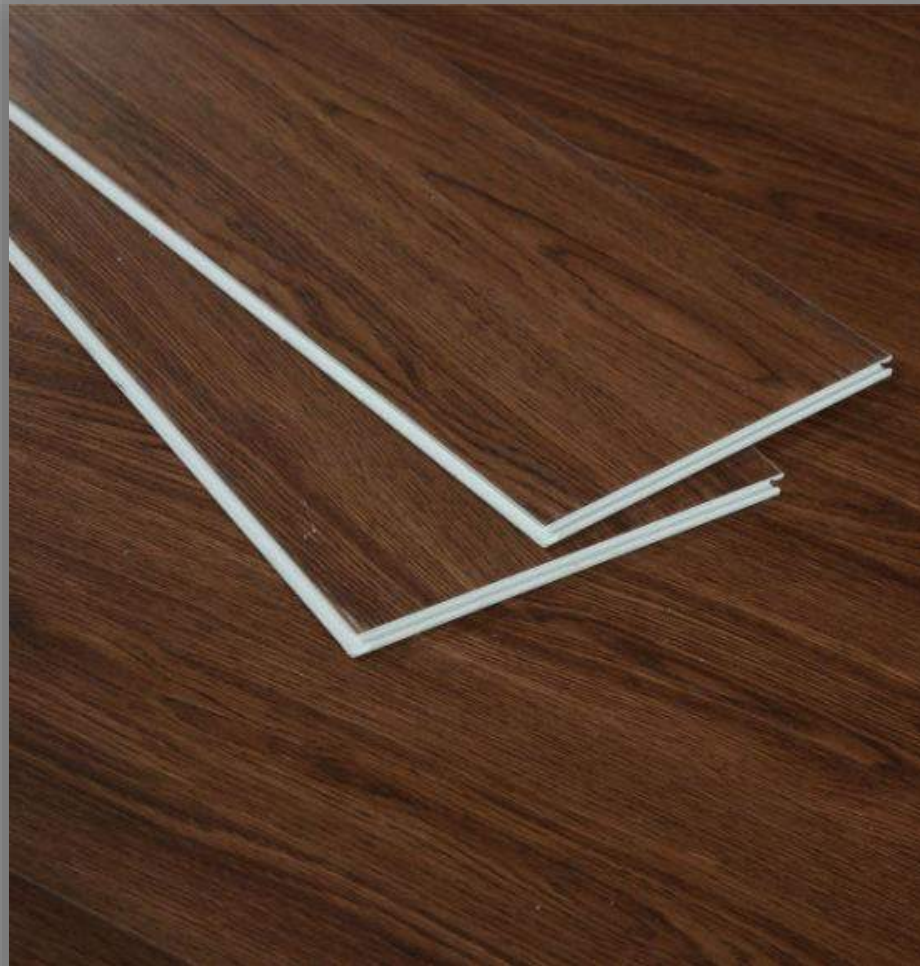

Benefits of Buying SPC Rigid Core VIRGIN PVC FOR EACH PLANK



Flooring Specifications

Plank Size	7.25" x 48", 12" x 24"
Thickness – Wear Layer	4.0mm – 0.3/0.5 & 5.0mm – 0.3/0.5
PVC Grade	100% Virgin
UV Coating	2 layer
Printed film layer	0.07
Installation Type	Click Lock
Acoustic Backing	No Backing / EVA / IXPE
Fire Retardant Rating	B1 Grade
Minimum Order Quantity	1*20'GP FCL Container
Per box	10 Planks
Per Box wt.	20 kg Approx
Product Origin	INDIA



Our Client



and counting



Thank You



C I Modular Systems Pvt Ltd

**F-90/23, Okhla Phase-1,
New Delhi 110 020**



**91-9911227763-64,
011 4301 5148**



contact@niveeta.com



www.niveeta.icom